


Informações Técnicas - Acoplamentos - NEX

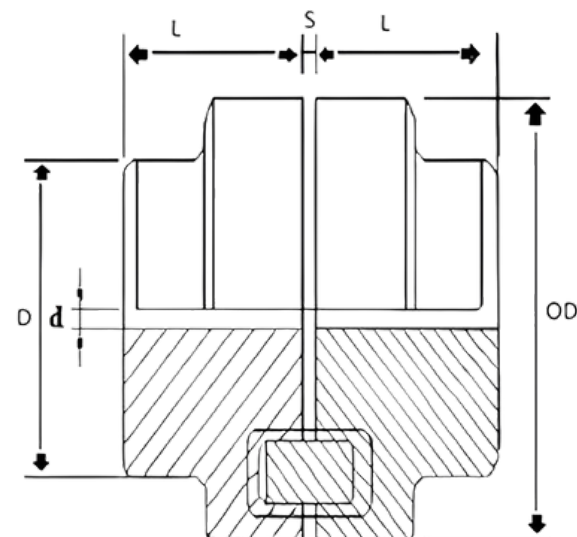

NEX	Tamanho	Torque		Rotação Máxima (rpm)	Dimensões (mm)						Peso (kg)
		Nom.	Máx.		Ø d		Ø cubos		Largura	GAP	
		(Nm)	(Nm)		Mín.	Máx.	(D)	(OD)	(L)	(S)	
	NEX-50	19,5	39	12500	7	19	33	50	25	2,0 ±0,5	0,48
	NEX-67	38	76	10000	8	28	46	67	30	2,5 ±0,5	1,02
	NEX-82	80	160	8000	10	32	53	82	40	3,0 ±1,0	1,88
	NEX-97	169	338	7000	10	42	69	97	50	3,0 ±1,0	3,54
	NEX-112	268,5	537	6000	14	48	79	112	60	3,5 ±1,0	5,4
	NEX-128	431,8	863,6	5000	18	55	90	128	70	3,5 ±1,0	8,1
	NEX-148	679	1358	4500	22	65	107	148	80	3,5 ±1,0	13,5
	NEX-168	1120	2240	4000	28	75	124	168	88	3,5 ±1,5	19,3
	NEX-194	1790	3580	3500	32	85	140	198	100	3,5 ±1,5	26,3
	NEX-214	2698,9	5397,8	3000	40	95	158	218	112	4,0 ±2,0	35,7